

Miniature Variable Attenuator

Part No.: WLSA-1112-0665

50Ω 6GHz SMA 65dB 2 Watt Manual Step Attenuator

Features

- Precise Attenuation
- Variable Attenuator




Electrical Specifications

Specification		
Frequency	6GHz	
Impedance	50Ω	
VSWR	DC-5GHz	1.4: 1 (MAX)
	5-6GHz	1.5: 1 (MAX)
Attenuation	0-65dB in 1dB Step	
Average Power	2Watt	
Connector Type	SMA Male to SMA Female	

Attenuation	
Frequency	Accuracy Range
DC-4GHz	±4.0dB
4-6GHz	±6.0dB

Outline Drawing

Units: mm

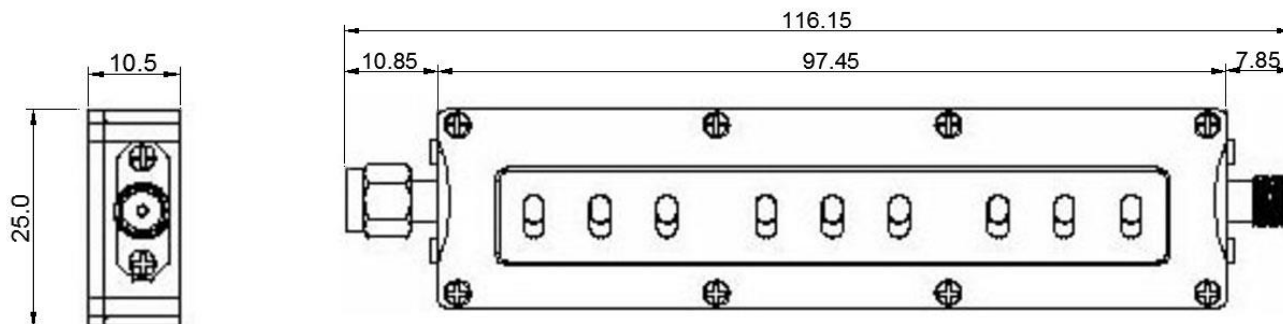

Dimension Tolerance: ±0.05mm